

PNL Flush Mount Panel Light



WARNING/ADVERTENCIA/AVERTISSEMENT

To reduce the risk of electrical shock, fire, or injury to persons; read and follow all warnings and installation instructions before installing. All installation should be performed by a qualified electrician.

Risk of Electric Shock

Ensure power is off before installation or inspection. All wirings are performed in accordance with Electrical Code and local electrical code.

Risk of Fire

Fixtures are rated for use in 120V, 60Hz protected circuit and 90°C rated supply wire.

Para reducir el riesgo de descarga eléctrica, incendio o lesiones a personas, lea y siga todas las advertencias e instrucciones de instalación antes de realizarla. Toda instalación debe ser efectuada por un electricista cualificado.

Riesgo de descarga eléctrica

Asegúrese de desconectar la corriente antes de la instalación o inspección. Todos los cableados se realizan de acuerdo con el Código Eléctrico y el código eléctrico local.

Riesgo de incendio

Las luminarias están clasificadas para su uso con 120V, circuitos protegidos de 60 Hz y cables adecuados para 90°C.

Lisez et suivez les instructions d'installation et les avertissements avant l'installation.

Toute l'installation doit être exécutée par un électricien qualifié, pour réduire les risques de choc électrique, de feu ou de blessures corporelles.

Risque de choc électrique

Assurez-vous que le courant soit coupé avant l'installation ou l'inspection et que tout le câblage soit effectué en conformité avec le code d'électricité et le code local d'électricité.

Risque de feu

Les luminaires sont conçus pour une utilisation de 120 V, pour un circuit protégé de 60 Hz et pour une source d'alimentation de 90°C.

FOR YOUR SAFETY

While performing installations described, gloves, safety glasses or goggles should be worn.

PARA SU SEGURIDAD

Mientras realice las instalaciones descritas, se recomienda el uso de guantes y gafas de seguridad.

POUR VOTRE SÉCURITÉ

Vous devriez porter des gants et des verres de protection lors des installations détaillées.

Install this kit only in the luminaire that have the construction features and dimensions shown in the photographs and/or drawings. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

Do not alter, relocate, or remove wiring, lampholders, power supply, or any other electrical component.

SUITABLE FOR DAMP LOCATIONS.

Instale este kit solo en la luminaria que tiene las características de construcción y dimensiones que aparecen en las fotografías y/o dibujos. No realice ni altere los agujeros abiertos en un recinto de cableado ni en cualquier componente eléctrico durante la instalación del kit.

Para evitar daños en el cableado o abrasiones, no exponga el cableado a hojas de metal laminado u otros objetos cortopunzantes.

No altere, reubique o elimine cables, portalámparas, tomacorriente o cualquier otro componente eléctrico.

APTO PARA LUGARES HÚMEDOS.

Installez cet ensemble seulement dans un luminaire qui possède les caractéristiques de construction et les dimensions telles que démontrées sur les photographies et/ou dessins. Ne pas percer de trous ou modifier les trous existants dans un boîtier ou des composants électriques durant l'installation de l'ensemble.

Pour prévenir les dommages ou l'abrasion, ne pas mettre en contact le câblage avec des bords de plaques de metal ou tout autre objet coupant.


Ne pas modifier, délocaliser ou enlever du câblage, des supports de lampes, une source d'alimentation ou tout autre composant électrique.

CONVIENT AUX ENDROITS HUMIDES.

INSIDE THE BOX



Accessories



Mounting Plate x 1



3/16 in. Toggle Bolts (4 pcs)



Wire Nuts (3 pcs)



Screws #8-32 x1in (2 pcs)

Plusrite USA
2000 S. Grove Ave, Bldg B
Ontario CA 91761

T:909-930-6868
T:888-758-7443
F:909-930-9988


www.natural^{led}.com

PNL Flush Mount Panel Light

INSTALLATION/INSTALACIÓN


Step 1

- Turn OFF the main power at the circuit breaker before installing fixture.
- Following tools will be needed to complete this job:
 - 1) Head Screw Driver
 - 2) Drill
 - 3) 1/2 in. Drill Bit
 - 4) Safety Glasses

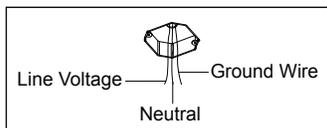


Step 3

- Using the mounting plate as a guide, mark the position of the 4 holes on the ceiling or wall where the toggle bolts will be placed.

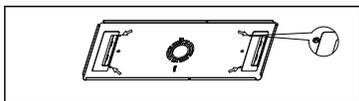



Step 5

- Feed the Junction box wires through the center of the mounting bracket plate hole.
- Re-install the mounting plate onto the ceiling in the same orientation as in Step 3 by inserting the toggle bolts into the drilled holes.
- Once the wings are through the drywall and have expanded, pull the screw downward to engage the wing on the backside of the ceiling. Once engaged, secure into place by tightening the screws.



Step 7


- Connect the 3 wires coming from the fixture to the Junction box wires (**black - line voltage, white - neutral and green - ground**).
- NOTE:** Please select the preferred color temperature by the switch on the back of the fixture.

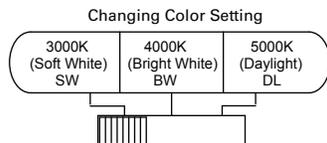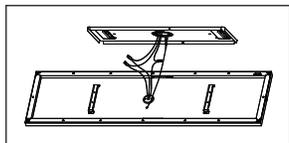

Step 2


- Install the mounting plate (1) to the junction box using the two #8-32 x 1 in. screws (4).
- Align the mounting plate in the direction you want the fixture to be aligned.

NOTE: Once the toggle bolts are installed, you cannot change the orientation of the LED Flat Panel. Take care to align the mounting plate properly in this step.




Step 4

- Remove the mounting plate (1) from the junction box.
- Drill the marked holes using a 1/2 in. drill bit.
- Remove the wings from the 3/16 in. toggle bolts (2).
- Insert screw (2) through front of the mounting plate (1) and then reattach the wing to the screw, do this for all toggle bolts.

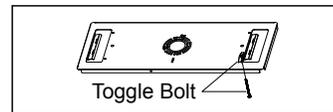


Step 6

- Connecting the LED Flat Panel
- Hook the support wire from the fixture on the mounting bracket plate, as shown.

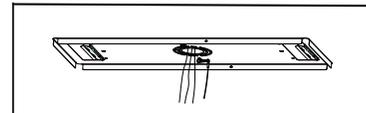


Step 8

- Insert swing arm's key hole slot into the mounting bracket plate's hanging screw, as shown.

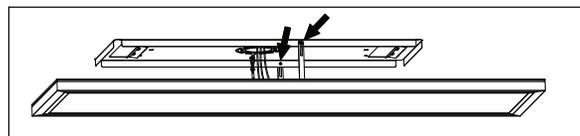

Step 9

- Feed the junction box and fixture wires through the mounting bracket plate's center hole into the junction box.
- Raise the Fixture to the direction of the arrow on the swing arm.

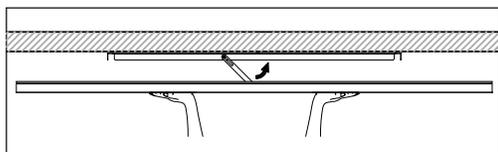

Step 10

- Once the fixture has been raised and is flush to the ceiling as shown, lock Fixture by moving it towards the opposite direction it was raised.

