

| Version     | 2.0 | Date | 7/29/22 |
|-------------|-----|------|---------|
| Prepared By | JC  |      |         |


|               | PRODUC                    |
|---------------|---------------------------|
| Category      | Emergency Exit Sign/Light |
| Item Number   | 7522                      |
| Stock Code    | LEDEM-FD-WH               |
| Mounting      | Wall Mount/ Ceiling Mount |
| Housing Color | White                     |




| ELECTRICAL CHARACTERISTICS |             |              |                                 |  |
|----------------------------|-------------|--------------|---------------------------------|--|
| Rated Wattage (W)          | 2           | Battery      | 3.6V 1000 mAh Ni-<br>MH Battery |  |
| Tested Wattage (W)         | 2           |              |                                 |  |
| Input Voltage (V)          | 120/277V    |              |                                 |  |
| Voltage Frequency (Hz)     | 50/60       | Power Factor | 0.4                             |  |
| Input Current (A)          | 0.09A (max) | Dimmable     | -                               |  |
| Charging Time              | 24 hrs      | AUX(12V)Line | -                               |  |
| Emergency Run Tim          | 90 min      | THD          | <20%                            |  |

| PHOTOMETRIC CHARACTERISTICS |       |         |       |  |
|-----------------------------|-------|---------|-------|--|
| Color                       | White | ССТ (К) | 6500K |  |
| Lumen (lm)                  | 240   | CRI     | 80    |  |
|                             |       |         |       |  |
|                             |       |         |       |  |

| GENERAL CHARACTERISTICS    |  |  |  |
|----------------------------|--|--|--|
| Operating Temperature (°F) | -32°F ~ 104°                                     |  |  |
| Storage Temperature (°F)   | -32°F ~ 104°                                     |  |  |
| IP Rating                  | IP20 (Indoor Only)                               |  |  |
| Material                   | Thermoplastic ABS Housing, UL 94V-0 Flame Rating |  |  |
| Rated Life (Hrs)           | 50,000   |  |  |
| Warranty (Yrs)             | 2  |  |  |

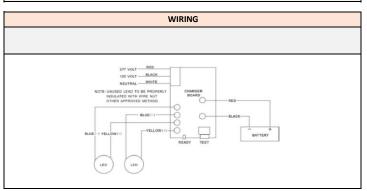

| Width- in / (mm)     | 11"   |   | 280  |
|----------------------|-------|---|------|
| Height- in / (mm)    | 4.43" |   | 110  |
| Depth- in / (mm)     | 2.65" |   | 67.5 |
| IK Rating            |       | - |      |
| Weight (lbs)         |       | 1 |      |
| Mounting Height (ft) |       | - |      |
| Cable Length (ft)    |       | - |      |

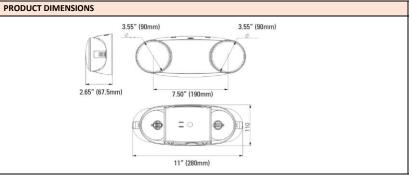

| CERTIFICATIONS     |        |      |   |
|--------------------|--------|------|---|
| UL/ETL             | UL/cUL | CEC  |   |
| NSF/ETL Sanitation |        | JA8  |   |
| Energy Star        |        | FCC  | ✓ |
| DLC                |        | RoHs | ✓ |

| DOCUMENTS |     |            |  |
|-----------|-----|------------|--|
| LM79      | IES | S File     |  |
| LM80      | Di  | immer List |  |
|           |     |            |  |
|           |     |            |  |

## COMMENTS