


| | | | |
|-------------|-----|------|---------|
| Version | 2.0 | Date | 2/12/24 |
| Prepared By | JC | | |

| PRODUCT SPECIFICATION | |
|-----------------------|---|
| Category | Linear Architectural Light |
| Item Number | 9552 |
| Stock Code | FXLAL60SW/48FR/8CCT5/BK/347 |
| Mounting | Pendant Mount/ Ceiling Mount/ Wall Mount/Recessed Mount |
| Housing Color | Black |

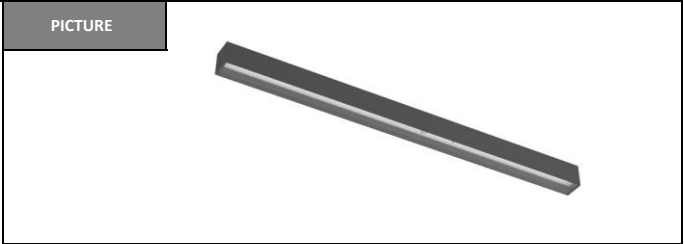

| ELECTRICAL CHARACTERISTICS | | | |
|----------------------------|----------------|-------------------------|---------|
| Rated Wattage (W) | 30/35/40/50/60 | Replacement Wattage (W) | 100-300 |
| Tested Wattage (W) | 30/35/40/50/60 | | |
| Input Voltage (V) | 120-347V | | |
| Voltage Frequency (Hz) | 50/60 | Surge Protect Level | 4KV |
| Input Current (A) | 0.55 | Dimmable | 0-10V |
| Power Factor | >0.9 | AUX (12V) Line | Yes |
| THD | <20% | Photocell | - |

| PHOTOMETRIC CHARACTERISTICS | | | |
|-----------------------------|--|---------|---|
| Lumen (lm) | 30W: 3,780 35W: 4,410 40W: 5,040 50W: 6,300 60W: 7,560 | CCT (K) | 5CCT (3000/3500/4000/5000/6500K) |
| | Efficacy (lm/w) | | 3000K:126lm/W 3500K:133lm/W 4000K:137lm/W 5000K:137lm/W 6500K:131lm/W |
| CRI | | >80 | |

| GENERAL CHARACTERISTICS | |
|----------------------------|---------------|
| Operating Temperature (°F) | -4°F ~ 122°F |
| Storage Temperature (°F) | -40°F ~ 176°F |
| IP Rating | IP20 |
| IK Rating | - |
| Rated Life (Hrs) | 50,000 |
| Warranty (Yrs) | 5 |
| | |
| | |

| ACCESSORIES | | |
|-------------|------------------|--|
| Item # | Stock Code | Description |
| 7336 | BAEM4-60BC/MV-A | 4W Emergency Driver 120-277V |
| P10551 | LM-2.5LAL/48/BK | 4-ft Uplight Bar 8CCT5 - Black |
| P10438 | SEN-HB001VCR-1 | 12V Motion Sensor 0-10V Dimming |
| P10547 | CNTR-2.5LAL/KIT | Linkable Connector Kit |
| P10555 | CNTR-2.5LAL/L/BK | L Shape Linear Architectural Light 8CCT5-Black |
| P10556 | CNTR-2.5LAL/T/BK | T Shape Linear Architectural Light 8CCT5-Black |
| P10557 | CNTR-2.5LAL/X/BK | X Shape Linear Architectural Light 8CCT5-Black |

| PRODUCT DIMENSIONS | | |
|----------------------|-------------|--|
| Length- in / (mm) | 47.24" 1204 | |
| Height- in / (mm) | 3.14" 80 | |
| Width- in / (mm) | 2.55" 65 | |
| EPA (ft²) | - | |
| Weight (lbs) | 3.96 | |
| Mounting Height (ft) | - | |
| Cable Length (ft) | - | |

| CERTIFICATIONS | | | |
|--------------------|--------------|------|---|
| UL/ETL | ETL/cETL | CEC | |
| NSF/ETL Sanitation | | JA8 | |
| Energy Star | | FCC | ✓ |
| DLC | 5.1 Standard | RoHs | ✓ |

| DOCUMENTS | | | |
|-----------|---|-------------|---|
| LM79 | ✓ | IES File | ✓ |
| LM80 | ✓ | Dimmer List | |
| | | | |

| COMMENTS |
|----------|
| |