

FMR FLUSH MOUNT ROUND

DESCRIPTION

naturaLED® Flush Mount Round (FMR) Features a white acrylic diffuser with a sleek, compact design. This LED lighting solution is designed to replace your current incandescent or fluorescent lighting with up to 86% energy savings. Our easy latch system secures the diffuser to the housing, making for quick installation. Mounting flush to the ceiling or wall, it is suitable for residential, commercial, hospitality and many more applications.

APPLICATIONS

Kitchen, Decoration, Hallway, Bedroom, Hospitality, Ceiling Mount Lighting

FEATURES

- Energy Star
- Damp Location
- Color Temperature: 3000K, 4000K, 5000K
- Voltage: 120V
- Powerfactor >0.9
- Surge Protection: 2.5KV
- Dimmable
- CRI: >80
- Operating temperature: - 4°F - 104°F
- Uniform light distribution and consistent color
- Lightweight and easy installation
- Retrofit for Incandescent and CFL flush mount
- Easy-latch system
- Recommended ceiling height: 9-10ft
- Color: White
- 5 Year Warranty

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:



Easy-latch system

Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES



Replacement Lens

RETROFIT / SAVE ENERGY

Replace Incandescent and CFL light with LED



Incandescent and CFL

LED

SAMPLE NUMBER LED16FMR-160L830

STYLE	DIAMETER	SERIES	LUMEN	CRI	COLOR TEMP
LED	16	FMR	160L	8	30
LED Lighting	16-inch	Flush Mount Round	>1,600 Lumens	CRI 80	3000K



FLUSH MOUNT ROUND

CEILING & AREA LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Damp Location	Energy Star
22	7146	LED16FMR-160L830	3000K	1,672	150	16"	•	•
22	7147	LED16FMR-160L840	4000K	1,672	150	16"	•	•
22	7157	LED16FMR-160L850	5000K	1,672	150	16"	•	•

ACCESSORIES (Ordered Separately)

Replacement Lens (16-inch)



P10133 LENS-16FMR
(Replacement Lens for 16")


Emergency Driver



7337 BAEM25-170BC/347-C
(25W Micro Inverter 120-347 with 12" Conduit)


DIMENSIONS

22W (16-inch)
1.72-lbs

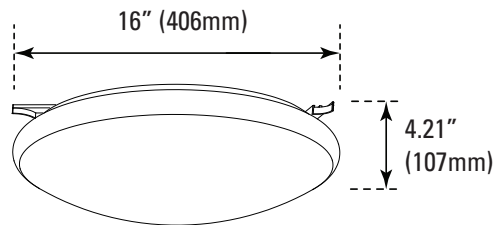

PHOTOMETRICS CHART

22W (16-inch)
Energy Star



Center Beam Ft.	Beam Width
2.5R	52.5 Fc 7.4 R 7.5 R
5.0R	13.1 Fc 14.9 R 15.0 R
7.5R	5.83 Fc 22.9 R 22.5 R
10.0R	3.28 Fc 29.7 R 30.0 R
12.5R	2.10 Fc 37.2 R 37.5 R
15.0R	1.46 Fc 44.6 R 45.0 R

■ Vert. Spread: 112.2°
■ Horiz. Spread: 112.6°

PACKAGE

Case Qty
5 pcs

