

Version	2.0	Date	4/5/18
Prepared By	JC		

PRODUCT SPECIFICATION	
Category	Flush Mount Streamlined
Item Number	7421
Stock Code	LED15FMS-154L830-BZ
Mounting	15" Surface
Housing Color	Bronze




ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	22	Replacement Wattage (W)	150
Tested Wattage (W)	22		
Input Voltage (V)	120V	Surge Protect Level	2.5KV
Voltage Frequency (Hz)	60	Dimmable	Yes
Input Current (A)	0.5	AUX (12V) Line	-
Power Factor	>0.9		
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	1,540	CCT (K)	3000K
Efficacy (lm/w)	-	Beam Angle (°)	Flood
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	-4°F ~ 104°
Storage Temperature (°F)	-4°F ~ 104°
IP Rating	Damp Location
IK Rating	-
Rated Life (Hrs)	50,000
Warranty (Yrs)	5

ACCESSORIES		
Item #	Stock Code	Description
7337	BAEM25-170BC/347-C	25W Micro Inverter 120-347V with 12" Conduit

PRODUCT DIMENSIONS		
Width- in / (mm)	15.00"	381
Height- in / (mm)	4.00"	101.6
Depth- in / (mm)	-	-
EPA (ft²)	-	-
Weight (lbs)	4.75	
Mounting Height (ft)	-	
Cable Length (ft)	-	

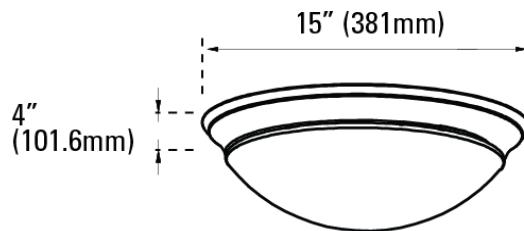

CERTIFICATIONS			
UL/ETL	UL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star	✓	FCC	✓
DLC		RoHs	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS