

CWP CUT-OFF WALL PACK

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:

DESCRIPTION

naturaLED® cut-off wallpack comes in rugged cast-aluminum housing with excellent thermal design. Our CWP product offers a popular but classic appearance with sleek angle design. Delivering up to 16,776 lumens with different wattages options: 40W, 60W, 80W, 120W. Replacing up to 750-watt metal halide luminaires and provides energy saving up to 72%. Our CWP is ideal for outdoor applications such as carports, loading areas, driveways, parking areas, and pathways. Suggested for wall mounting minimum above four feet from ground.

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades




Rated Life 50,000 Hours
Warranty 5 Years

FEATURES

- DLC Premium Qualified
- IP65 Rated
- UL Listed
- Uniform and consistent color
- Material: Die Cast Aluminum
- Input line voltage: 120-277V
- Power Factor: >0.9
- Dimmable: 1-10V
- CRI: 70
- Surge Protection:
 - 4KV (40W-80W)
 - 6KV (120W)
- Color Temp: 4000K, 5000K
- Operating temperature: - 40°F - 122°F
- Finish Color: Bronze
- 15-30 foot height performance
- Rated 50,000 hours average life
- Optional Accessories for Purchase: Photocell Sensor, Emergency Drivers

ACCESSORIES

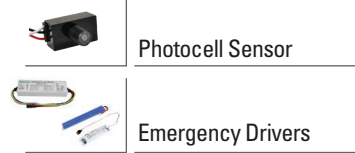

Photocell Sensor

Emergency Drivers

SAMPLE NUMBER LED-FXCWP40/40K/BZ

STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP	FINISH COLOR
LED LED Lighting	FX Fixture	CWP Cutoff Wall Pack	40 <40 Watt	40K 4000K	BZ Bronze



CUT-OFF WALL PACK

WALL & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Size	Equiv. Wattage (W)	Dim (V)	IP65 Rated	DLC (S/P)
39	9319	LED-FXCWP40/40K/BZ	4000K	5,288	14.2" x 9.25"	250	1-10V	•	P
39	9320	LED-FXCWP40/50K/BZ	5000K	5,356	14.2" x 9.25"	250	1-10V	•	P
63	9208	LED-FXCWP60/40K/BZ	4000K	8,347	14.2" x 9.25"	400	1-10V	•	P
63	9209	LED-FXCWP60/50K/BZ	5000K	8,425	14.2" x 9.25"	400	1-10V	•	P
83	9443	LED-FXCWP80/40K/BZ	4000K	11,048	14.2" x 9.25"	400-575	1-10V	•	P
83	9444	LED-FXCWP80/50K/BZ	5000K	11,193	14.2" x 9.25"	400-575	1-10V	•	P
121	9445	LED-FXCWP120/40K/BZ	4000K	16,525	14.2" x 9.25"	575-750	1-10V	•	P
121	9446	LED-FXCWP120/50K/BZ	5000K	16,776	14.2" x 9.25"	575-750	1-10V	•	P

ACCESSORIES (Ordered Separately)

Emergency Driver



7336 BAEM4-60BC/MV-A
(4W CEC Compliant LED Emergency Driver for 39W)



7334 BAEM15-48BC/MV-A
(15W CEC Compliant LED Emergency Driver for 63W,83W,121W)

Photocell



P10036 SEN-PHO-BT-MT/MV
(Button Photocell 120-277V)



DIMENSIONS

39W
6.85-lbs

63W
7.05-lbs

83W
7.48-lbs

121W
10.56-lbs

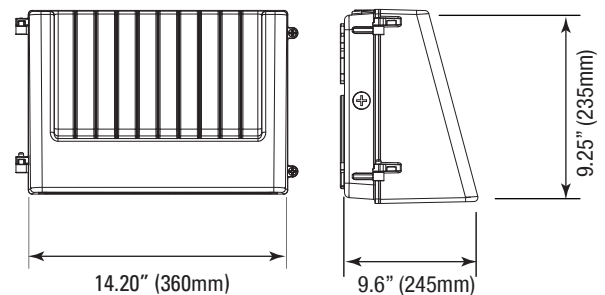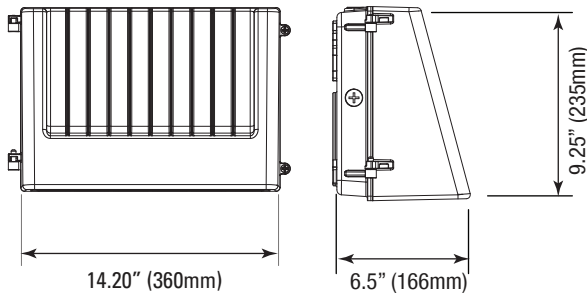

PHOTOMETRICS CHART

PACKAGE

39 Watt
DLC Premium

63 Watt
DLC Premium

83 Watt
DLC Premium

121 Watt
DLC Premium

Case Qty 1 pc

