

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DLR/DLS SLIM DISK LIGHT CCT3

DESCRIPTION

Introducing our ultra-low profile selectable CCT LED downlight with matte white flange and die-cast aluminum construction for durability. This down slim light can accommodate dimmable LED lamp for delivering a light output up to 800+ lumens with 3000K, 4000K, 5000K color temperature selectable and CRI 90. Both round and square downlight has a trim of 4-inch and 6-inch with high impact diffused lens shade for even light distribution. It is suitable for damp locations.

APPLICATIONS

Kitchen, decoration, hallway, bedroom, ceiling mount lighting


FEATURES

- Energy Star Qualified
- Suitable for damp location
- Ultra slim design for dry wall (no recessed can needed)
- 4" / 6" round or square design
- IC rated
- ETL listed
- JA9/Title 24
- Selectable CCT: 3000K, 4000K, 5000K
- Voltage: 120V
- Power Factor: >0.9
- Surge Protection: 1KV
- Dimmable
- CRI: 90
- Beam Angle: Flood
- Recommended ceiling height at 8-10ft
- Operating temperature: - 4°F - 113°F
- Finish Color: White





EASY INSTALLATION

Snap-in mounting springs and easy wiring access for quick installation



STYLES

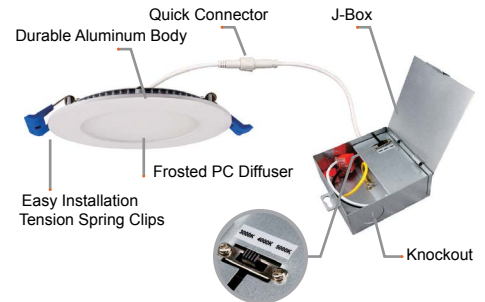

SAMPLE NUMBER LED4DLR-60L9CCT3

STYLE	DIAMETER	SERIES	LUMENS	CRI	COLOR TEMP
LED	4	DLR	60L	9	CCT3
LED Lighting	4-inch	Slim Disk Light Round	600+ Lumens	CRI 90	Selectable Color Temperature (3000K, 4000K, 5000K)
		DLS			
		Slim Disk Light Square			



ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Size	Equiv. Wattage (W)	Damp Location	Energy Star
9	9368	LED4DLR-60L9CCT3	3CCT (3/4/5K)	600	4" Round	60	•	•
9	9369	LED4DLS-60L9CCT3	3CCT (3/4/5K)	600	4" Square	60	•	•
12	9371	LED6DLS-80L9CCT3	3CCT (3/4/5K)	800	6" Square	90	•	•

ACCESSORIES (Ordered Separately)

Plate for 4" Disk Light



P10308 PLT-NC/4DL
(4" Round Pre-Mounting Plate)

Plate for 3/4/6/8" Disk Light



P10375 PLT-NC-DL/3-4-6-8
(Universal Plate for 3/4/6/8" Disk Light)

Plate for 6" Disk Light




P10309 PLT-NC/6DL
(6" Round Pre-Mounting Plate)

DIMENSIONS


4" - Round

0.94-lbs

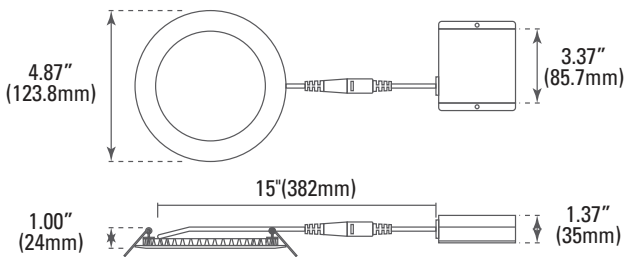


4" - Square

0.94-lbs

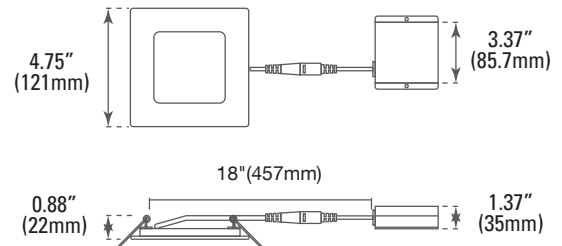


6" - Round

1.28-lbs

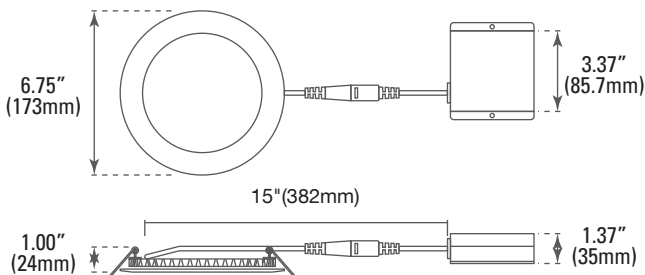


6" - Square

1.28-lbs

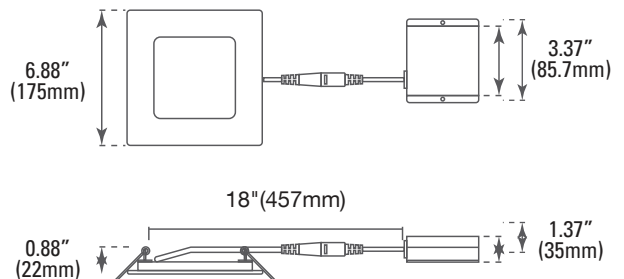

PHOTOMETRICS CHART


4-inch Round Energy Star

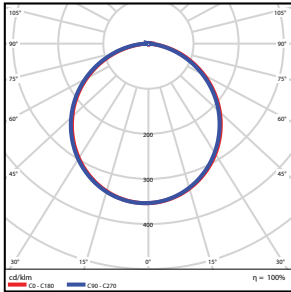

Height	Center Beam fc		Beam Width	
	Center Beam fc	Beam Width	Center Beam fc	Beam Width
2.5R	36.1 fc	7.4 ft	7.3 ft	
5.0R	9.03 fc	14.7 ft	14.6 ft	
7.5R	4.01 fc	22.1 ft	22.0 ft	
10.0R	2.26 fc	29.4 ft	29.3 ft	
12.5R	1.44 fc	36.8 ft	36.6 ft	
15.0R	1.00 fc	44.2 ft	43.9 ft	

Vert. Spread: 111.6°
Horiz. Spread: 111.4°


4-inch Square Energy Star

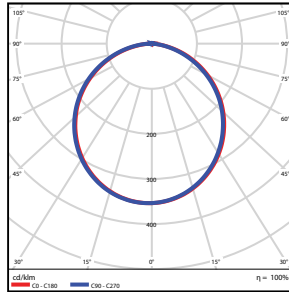

Height	Center Beam fc		Beam Width	
	Center Beam fc	Beam Width	Center Beam fc	Beam Width
2.5R	36.1 fc	7.4 ft	7.3 ft	
5.0R	9.03 fc	14.7 ft	14.6 ft	
7.5R	4.01 fc	22.1 ft	22.0 ft	
10.0R	2.26 fc	29.4 ft	29.3 ft	
12.5R	1.44 fc	36.8 ft	36.6 ft	
15.0R	1.00 fc	44.2 ft	43.9 ft	

Vert. Spread: 111.6°
Horiz. Spread: 111.4°


6-inch Round Energy Star

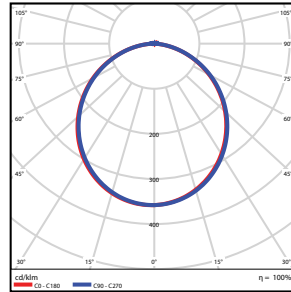

Height	Center Beam fc		Beam Width	
	Center Beam fc	Beam Width	Center Beam fc	Beam Width
2.5R	49.2 fc	7.1 ft	7.1 ft	
5.0R	12.3 fc	14.3 ft	14.3 ft	
7.5R	5.47 fc	21.4 ft	21.4 ft	
10.0R	3.08 fc	28.5 ft	28.6 ft	
12.5R	1.97 fc	35.7 ft	35.7 ft	
15.0R	1.37 fc	42.8 ft	42.8 ft	

Vert. Spread: 109.9°
Horiz. Spread: 110.0°

6-inch Square Energy Star

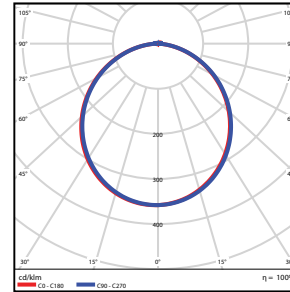

Height	Center Beam fc		Beam Width	
	Center Beam fc	Beam Width	Center Beam fc	Beam Width
2.5R	49.2 fc	7.1 ft	7.1 ft	
5.0R	12.3 fc	14.3 ft	14.3 ft	
7.5R	5.47 fc	21.4 ft	21.4 ft	
10.0R	3.08 fc	28.5 ft	28.6 ft	
12.5R	1.97 fc	35.7 ft	35.7 ft	
15.0R	1.37 fc	42.8 ft	42.8 ft	

Vert. Spread: 109.9°
Horiz. Spread: 110.0°

PACKAGE

Case Qty 20 pcs

