

PROJECT: _____

SCHEDULE: _____ DATE: _____


PREPARE BY: _____

NOTES: _____

FMD FLUSH MOUNT DISK CCT3

DESCRIPTION

naturaLED® ultra-low profile flush mount disk (FMD), promoting an even light distribution with CRI 90 ratings. With versatile installation methods, our FMD can be install flush mount into standard junctions box or retrofit for recessed down light housings. Featuring “selectable color temperature” can easily adjust the color temperature by the color switch to 3000K, 4000K, or 5000K. This product is also dimmable to 5%-10% on a 120-volt standard dimmer.

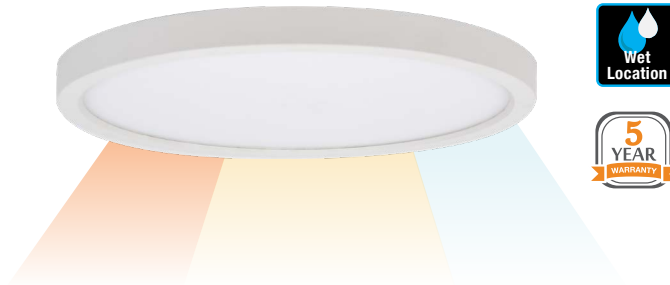

APPLICATIONS

Kitchen, Decoration, Hallway, Bedroom, Ceiling Mount Lighting

FEATURES

- Energy Star
- Wet Location
- ETL Listed
- JA8/Title 24
- Uniform light distribution and consistent color
- Lightweight and easy installation
- Selectable Color Temperature: 3CCT (3000K, 4000K, 5000K)
- Input line voltage: 120V
- Input Current: 0.125A
- Surge Protection: 2.5KV
- CRI: 90
- Powerfactor >0.9
- Beam Angle: Flood
- Dimmable
- Operating Temperature: -4°F - 113°F
- Recommended ceiling height: 8-10ft
- 5 Year Warranty
- Finish: White
- Optional for Purchase: Compatible Emergency Driver/ ColorTrims



Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES

- Recessed can installation kit
- Emergency Driver
- Mount Space Ring
- Trims (3 colors)

CCT ADJUSTABLE
Select Color Temperature by the color switch

SAMPLE NUMBER LED7FMD-90L9CCT3

STYLE	DIAMETER	SERIES	LUMENS	CRI	COLOR TEMP
LED	7	FMD	90L	9	CCT3
LED Lighting	7 inch	Flush Mount Disk	900 Lumens	CRI 90	Selectable Color Temp



FLUSH MOUNT DISK CCT3


CEILING & AREA LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Wet Location	Energy Star
13.5	9372	LED7FMD-90L9CCT3	3CCT (3/4/5K)	900	100	7"	•	•

ACCESSORIES (Ordered Separately)

Installation Kit



P10262 MTK-FMD-E26-SPRING
(Recessed can installation kit)

Emergency Driver



P10246 BAEM-7FMD
(Emergency Driver for FMD)

Trim



P10243 RT-7FMD-BK
(Black 7" Trim)

P10244 RT-7FMD-NI
(Nickel 7" Trim)

P10245 RT-7FMD-BZ
(Bronze 7" Trim)


Mount Space Ring



P10304 MT-SR1-7FMD-WH
(EM Ballast Space Ringer 1")


DIMENSIONS

13.5W (7-inch)
0.65-lbs

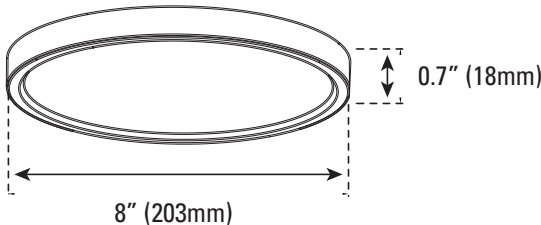

PHOTOMETRICS CHART

13.5W (7-inch)
Energy Star



Illuminance at a Distance		
Center Beam fc	Beam Width	
2.5ft	52.5 fc	7.4 ft 7.5 ft
5.0ft	13.1 fc	14.9 ft 15.0 ft
7.5ft	5.85 fc	22.3 ft 22.5 ft
10.0ft	3.28 fc	29.7 ft 30.0 ft
12.5ft	2.10 fc	37.2 ft 37.5 ft
15.0ft	1.46 fc	44.6 ft 45.0 ft

■ Vert. Spread: 112.2°
■ Horiz. Spread: 112.6°

PACKAGE

Case Qty
20 pcs

