

### Key Features & Benefits

- ▶ IP65 Rated
- ▶ Uniform and consistent color
- ▶ Aluminum die cast housing
- ▶ Excellent thermal design
- ▶ Photocell sensor compatible
- ▶ Universal Voltage 120-277V
- ▶ IP65 Outdoor Rated
- ▶ Operating Temp: -30°F~130°F
- ▶ 50,000 Hours rated average life
- ▶ Available with 3 types of mounting options




● Dark Bronze



### Applications

- ▶ Parking Lot Lighting
- ▶ Street Lighting
- ▶ Site Lighting
- ▶ Streetscape Lighting
- ▶ Area Lighting




### Energy Savings

LED Description	LED Life(hrs)	Equivalent Metal Halide	Metal Halide Life(hrs)	Savings in Energy Cost*
75W	50,000	250 Watt	10,000	\$962
110W	50,000	400 Watt	10,000	\$1595


\*Based on using LED bulb for 50,000 hrs at 11¢/kWh compared to equivalent fixture

### Product Dimensions




LED Wattage	Length (in/mm)	Width (in/mm)	Height (in/mm)	Weight (lbs)
75 Watt	12.15 / 308	12.25 / 311	5.25 / 133	14.11
110 Watt	16.5 / 419	16.5 / 419	7 / 178	23.15


### Mount Options




Slip Fitter




Length: 6.96-in  
Width: 3.071-in  
Height: 2.95-in  
Diameter: 2.5-in



Swivel Bracket



Length: 5.5-in  
Width: 3.75-in  
Height: 4.75-in



6" Extruded Arm





Length: 8.87-in  
Width: 4.5-in  
Height: 4.17-in



Item Code	Description	Wattage	Mount	Lumen Output	CRI	Equivalent Wattage	Voltage	Finish	IP65
<b>7114</b>	LED-FXSB75/3S/40K/DB-EA6	75W	6" Extruded	5,898	70	100-150W	120-277	Dark Bronze	●
<b>7118</b>	LED-FXSB110/3S/40K/DB-SF	110W	Slip Fitter	8,574	70	250-400W	120-277	Dark Bronze	●
<b>7119</b>	LED-FXSB110/3S/40K/DB-SB	110W	Swivel Bracket	8,574	70	250-400W	120-277	Dark Bronze	●
<b>7169</b>	LED-FXSB110/3S/50K/WH-EA6	110W	6" Extruded	8,574	70	250-400W	120-277	White	●

## Photometrics

### 75 Watt

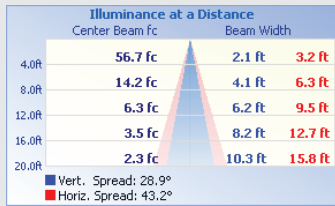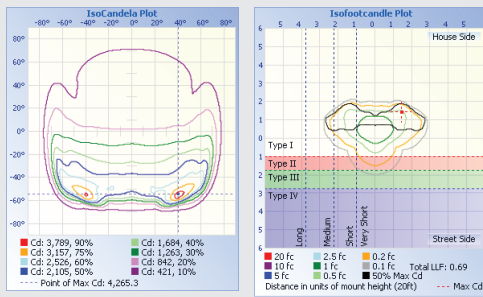

### 110 Watt

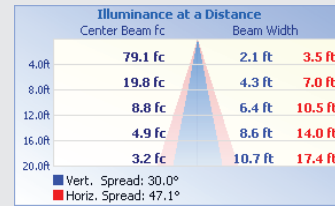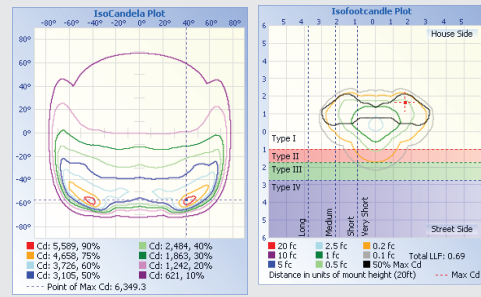

## Package



LED Wattage	Package (Master)
75 Watt	1
110 Watt	1