

SWP SLIM WALL PACK

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® slim, low-profile cutoff wall pack with the smooth contemporary design. Well-engineered, high-quality die-cast aluminum, delivering bright, crisp light. The excellent thermal design ensures our SWP's performance over rated life. Installation is made simple and easy with an adjustable angle and hinged junction box. SWP is ideal for landscape, wall/surface, low-level pathway, apartment buildings, schools and multi-use facilities.



APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades

FEATURES

- IP65 Rated
- ADA Compliance (4" Depth)
- Excellent thermal design
- Input line voltage: 120-277V
- Beam Angle: 110°
- CRI: 70
- Surge Protection: 2KV
- Material: Die Cast Aluminum
- Corrosion resistant powder coating
- Photocell compatible
- Operating temperature: -22°F - 122°F
- 5 Year Warranty
- Finish: Bronze / Black
- Optional for Purchase: Photocell Sensor

ACCESSORIES



SAMPLE NUMBER		LED-FXSWP15/40K/BK			
STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP	FINISH COLOR
LED	FX	SWP	15	40K	BK
LED Lighting	Fixture	Slim Wall Pack	15 Watt	4000K	Black (DB) Bronze



ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Color	Depth* (ADA)	IP65 Rated
15	7462	LED-FXSWP15/40K/BK	4000K	1,740	75	Black	4"	•
15	7573	LED-FXSWP15/50K/DB	5000K	1,740	75	Dark Bronze	4"	•
50	7548	LED-FXSWP50/40K/BK	4000K	5,508	250	Black	4"	•
50	7549	LED-FXSWP50/50K/BK	5000K	5,856	250	Black	4"	•
50	7577	LED-FXSWP50/50K/DB	5000K	5,856	250	Dark Bronze	4"	•

*Accessible for Americans with Disability Act

ACCESSORIES (Ordered Separately)


Photocell Sensor



P10036 SEN-PHO-BT-MT/MV
(Button Photocell 120-277V)

DIMENSIONS

15W / 50W
3.90-lbs


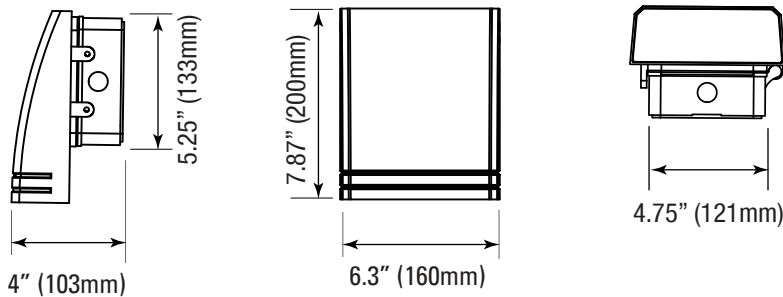


PHOTOMETRICS CHART

PACKAGE

15 Watt

50 Watt

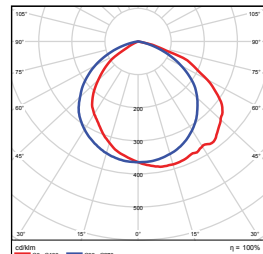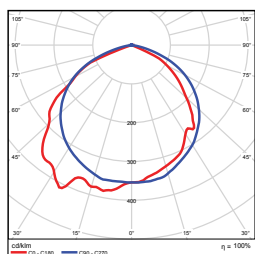

Illuminance at a Distance

Center Beam (ft)	Beam Width (ft)
5.0ft: 24.6 fc	12.4 ft 13.7 ft
10.0ft: 6.16 fc	24.8 ft 27.4 ft
15.0ft: 2.74 fc	37.2 ft 41.2 ft
20.0ft: 1.54 fc	49.6 ft 54.9 ft
25.0ft: 0.99 fc	61.9 ft 68.6 ft
30.0ft: 0.68 fc	74.3 ft 82.3 ft

Vert. Spread: 102.2°
Horiz. Spread: 107.8°

Illuminance at a Distance

Center Beam (ft)	Beam Width (ft)
5.0ft: 80.4 fc	13.7 ft 14.5 ft
10.0ft: 20.1 fc	27.3 ft 29.0 ft
15.0ft: 8.93 fc	41.0 ft 43.6 ft
20.0ft: 5.02 fc	54.6 ft 58.1 ft
25.0ft: 3.22 fc	68.3 ft 72.6 ft
30.0ft: 2.23 fc	81.9 ft 87.1 ft

Vert. Spread: 107.0°
Horiz. Spread: 110.9°

Case Qty 5 pcs

