

T5 INSTANT FIT T5 TUBES

PROJECT:	
SCHEDULE:	DATE:
PREPARE BY:	
NOTES:	

DESCRIPTION

naturaLED® Instant-Fit T5 easiest way to upgrade your fluorescent fixture to an LED lighting system. Our Instant-Fit T5 fits into an existing fluorescent lighting system. Utilizes the existing electrical T5 fluorescent ballast without re-wiring.

APPLICATIONS

Retails, restaurants, hospitalities, offices, schools

FEATURES

- DLC Standard
- UL Damp Location
- Color Temp: 4000K, 5000K
- Power Factor: >0.9
- Beam Angle: 325°
- Non-dimmable
- CRI: 80
- Instant On
- Compatible with electronic fluorescent ballast*
- Instant Fit/ Plug and Play (UL Type A)
- Base: Mini Bi-Pin G5
- Length: 4-ft
- 5Year Warranty
- Operating temperature: - 4°F - 113°F
- 50,000 hrs rated average life



Rated Life 50,000 Hours
Warranty 5 Years

*check compatibility list

SAMPLE NUMBER		LED28T5/FR35/840/IF			
SERIES	WATTAGE	FAMILY	WATTAGE	CRI/COLOR TEMP	TYPE
LED	28	T5	FR35	840	IF
LED Lighting	28 Watt	T5 Tubes	Frosted 3,500 lumens	CRI 80 4000K	Instant Fit



INSTANT FIT T5 TUBES

TUBE LUMINAIRES


ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equivalent Wattage	Length	Base	UL Damp	DLC (S/P)
28	5992	LED28T5/FR35/840/IF	4000K	3,500	54W	4-ft	Bi-Pin G5	•	S
28	5993	LED28T5/FR35/850/IF	5000K	3,500	54W	4-ft	Bi-Pin G5	•	S
28	5902	LED28T5/FR32/840/IF	4000K	3,200	54W	4-ft	Bi-Pin G5	•	-


DIMENSIONS

T5 (4-ft)
0.24-lbs

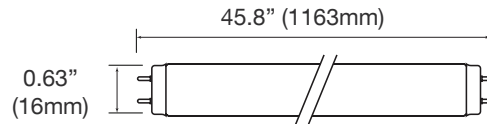

PHOTOMETRICS CHART

28 Watt (4-ft)
DLC Standard

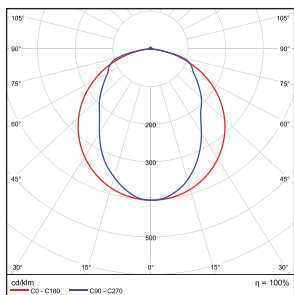

Center Beam fc	Beam Width
2.5 ft	760 fc 8.0 ft 4.4 ft
5.0 ft	190 fc 15.9 ft 8.8 ft
7.5 ft	84.5 fc 23.9 ft 13.2 ft
10.0 ft	47.5 fc 31.9 ft 17.6 ft
12.5 ft	30.4 fc 39.8 ft 22.0 ft
15.0 ft	21.1 fc 47.8 ft 26.4 ft

■ Vert. Spread: 115.8°
■ Horiz. Spread: 82.8°

PACKAGE

Case Qty 25 pcs

