

EMT8 EMERGENCY T8 TUBE

PROJECT:					
SCHEDULE:	DATE:				
PREPARE BY:					
NOTES:					

DESCRIPTION

naturaLED® EmergencyT8 Tubes acts as a regularT8 LED Light with emergency lighting capabilities. Our emergency T8 tube fits into an existing fluorescent lighting system which produces up to 2,000 lumens in regular mode and 500 lumens in emergency mode and allows 90-minutes of run time during emergency.





Rated Life 50,000 Hours

Warranty 5 Years

APPLICATIONS

Retails, restaurants, hospitalities, offices, schools

FEATURES

- For Damp Location
- UL924 Listed
- Color Temperature: 3CCT(3500/4000/5000K)
- Voltage: 120-277V • Input Current: 0.1A Surge Protection: 2KV • Power Factor: >0.9 • Beam Angle: 325°
- Non-dimmable
- CRI: >80
- Operating temperature: 32°F 113°F
- Instant On/ Battery Backup
- Battery: Ternary Lithium Battery
- Base: Medium Bi-Pin G13 (fixture powered by hardwire)
- Emergency RunTime: >90min
- Length: 4-ft
- 5 Year Warranty
- 50,000 hrs rated average life / 300 Emergency Cycles

BASE TYPE

T8



SAMPLE NUMBER

LEDEM14.5T8/FR20/8CCT3/MV CEDIEC

STYLE		WAITAGE	SERIES	WAITAGE	CKI/CULUK TEMP	IYPE	
	LED	EM14.5	Т8	FR20	8CCT3	MV	
	LED Lighting	14.5 Watt Emergency Backup Battery	T8 Tubes	Frosted 2,000 lumens	CRI 80 Selectable Color Temp (3500/4000/5000K)	Multiple Voltage 120-277V	













ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Lumens Emergency(Lm)	Emergency Run Time	Base	UL Listed
14.5	4613	LEDEM14.5T8/FR20/8CCT3/MV	3CCT	2,000	500	90 min	Bi-Pin	•
(35/40/50K)								

DIMENSIONS

14.5W (4-ft) 0.76-lbs (345g)

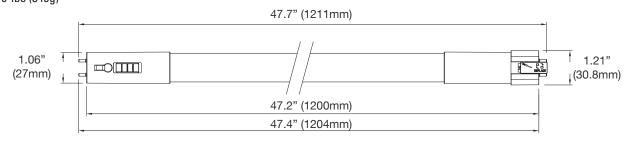

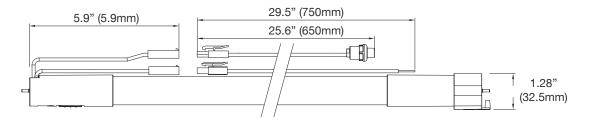

PACKAGE

WIRING INSTRUCTIONS

