

USL Utility Strip Light

DESCRIPTION

naturaLED® Utility Strip Light provides the perfect solution for your lighting needs. The LED utility strip light maximizes energy savings and is designed for multiple applications including new construction. The fixture offers in 4ft, or 8ft long and can be installed end to end. The LED Utility Strip Light can be used for warehouse, parking garages, stairwells, offices, hallways and many other applications in industrial, commercial and residential. Types of installation include ceiling, wall, chain or cable mounting. Our Utility Strip Light features an acrylic opaque lens with an aluminum body.

APPLICATIONS

Warehouse, Pathway Lighting, Parking Garage, Stairwells, Hallways, Retail Lighting

FEATURES

- Damp Location
- UL Listed
- Mounting brackets/clips for ceiling, wall, cable, and chain
- Easy installation with multiple mounting options
- CCT: 5000K
- Voltage: 120-277V
- Power Factor: >0.9
- CRI: 80
- Surge Protection: 2KV
- Dimmable: 1-10V
- Beam Angle: Flood
- Operating temperature: -22°F - 113°F
- Material: Aluminum and Opaque Lens

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____



**Rated Life 50,000 Hours
Warranty 5 Years**

SAMPLE NUMBER LED-FXUSL40/48FR/50K/MV

STYLE	FAMILY	SERIES	WATTAGE	LENGTH	COLOR TEMP	VOLTAGE
LED LED Lighting	FX Fixture	USL Utility Strip Light	40 40 Watt	48FR 48 inch Frosted Lens	50K 5000K	MV Multiple Voltage




ORDERING


Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Size	Dim	Equiv. Wattage (W)	Damp Location
24	7799	LED-FXUSL24/48FR/50K/MV	5000K	3,255	3.26" x 48"	1-10V	2 x32WT8	•
40	9201	LED-FXUSL40/48FR/50K/MV	5000K	5,286	3.26" x 48"	1-10V	3 x32WT8	•
61	9203	LED-FXUSL64/96FR/50K/MV	5000K	7,943	3.26" x 96"	1-10V	4 x32WT8	•

DIMENSIONS

4ft
3.66-lbs

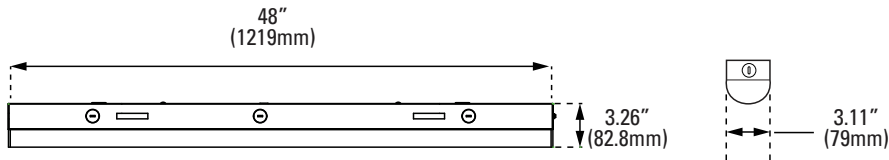


8ft
6.92-lbs

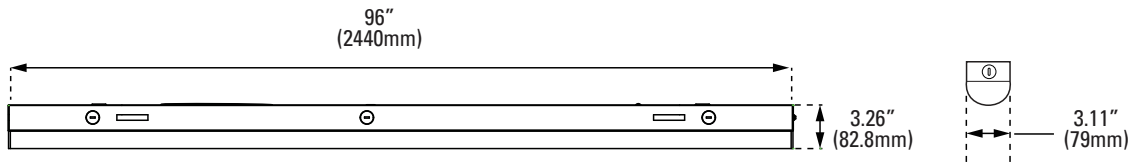

PHOTOMETRICS CHART

PACKAGE


24 Watt - 4ft



Dist	Illuminance at a Distance	
	Center Beam Fc	Beam Width
5.0ft	32.6 fc	12.5 ft
10.0ft	8.14 fc	25.1 ft
15.0ft	3.62 fc	37.6 ft
20.0ft	2.04 fc	50.1 ft
25.0ft	1.30 fc	62.7 ft
30.0ft	0.90 fc	75.2 ft

■ Vert. Spread: 102.0°
■ Horiz. Spread: 131.0°


40 Watt - 4ft



Dist	Illuminance at a Distance	
	Center Beam Fc	Beam Width
5.0ft	53.7 fc	26.2 ft
10.0ft	13.4 fc	52.3 ft
15.0ft	5.97 fc	78.5 ft
20.0ft	3.36 fc	104.7 ft
25.0ft	2.15 fc	130.9 ft
30.0ft	1.49 fc	157.0 ft

■ Vert. Spread: 130.2°
■ Horiz. Spread: 108.6°

64 Watt - 8ft



Dist	Illuminance at a Distance	
	Center Beam Fc	Beam Width
5.0ft	82.6 fc	13.4 ft
10.0ft	20.6 fc	26.9 ft
15.0ft	9.18 fc	40.3 ft
20.0ft	5.16 fc	53.7 ft
25.0ft	3.30 fc	67.2 ft
30.0ft	2.29 fc	80.6 ft

■ Vert. Spread: 106.7°
■ Horiz. Spread: 145.5°

Case Qty 1 pc

