# naturaled

# **EX/EM** EMERGENCY EXIT SIGNS & LIGHT

**PROJECT:** 

DATE:

PREPARE BY:

**SCHEDULE:** 

NOTES:

### DESCRIPTION VFAR naturaLED® featuring Bi-Color Emergency Exit Signs and Dual Head Emergency light. #7521 Injection-molded thermoplastic ABS housing. Easy to install, long-lasting LED light with test switch and charge indicator light. UL 94V-0 flame rated with up to 2 year warranty. **APPLICATIONS Emergency Exit, Emergency Lighting** #7522 Rated Life 50,000 Hours Warranty 2 Years

#### **FEATURES**

#### UL Listed

- IP22 Rated (Indoor only)
- Voltage:120/277V
- Battery: Ni-Cad 3.6V 1000mAh
- Adjustable heads / 1.2W Per head (Dual Head)
- Operating Temperature: 32°F ~ 104°F
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Innovation, easy installation
- Suitable for wall mount & ceiling mount (Dual Head)
- Suitable for wall mount & J-Box ceiling mount, Single or double faces (for Both Emergency Exit Signs)
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- •Warranty: 2 years
- Rated Life Hours: 50,000

SAMPLE NUMBER LEDEX-GRN/RED-WH									
STYLE	ТҮРЕ	COLORS	HOUSING COLOR						
LED	EX	GRN/RED	WH						
LED Lighting	Emergency Exit Sign	Green/ Red	White						




## EMERGENCY EXIT SIGN & LIGHT WALL LUMINAIRES

#### **ORDERING**

Watts (W)	Ordering Code	Description	Lumens	Voltage	Input Current (A)	Built-in Battery	Charing Time	Emergency Run Time
1	7521	LEDEX-GRN/RED-WH	-	120/277V	0.09A(max)	1.2V-1000mAH	24-hrs	90-min
3.5	7528	LEDEX-EMFD-GRN/RED-WH	>180	120/277V	0.031A(max)	1.2V-1000mAH	24-hrs	90-min
2	7522	LEDEM-FD-WH	240	120/277V	0.09A(max)	3.6V-1000mAH	24-hrs	90-min


#### DIMENSIONS

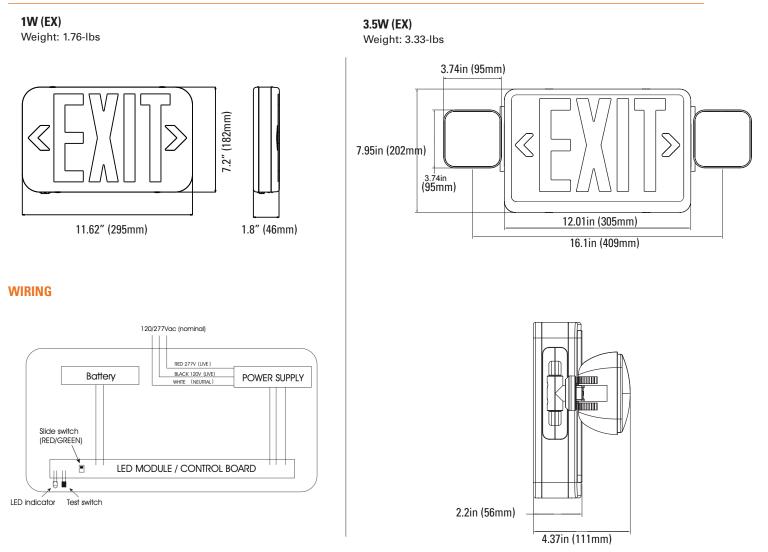


#### **DIMENSIONS**

#### 2W (EM)

Weight: 1.00-lbs



#### WIRING



#### PACKAGE

