

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

CWP CUT-OFF WALL PACK

DESCRIPTION

naturaLED® cut-off wallpack comes in rugged cast-aluminum housing with excellent thermal design. DesignLights Consortium certified, our CWP product offers a popular but classic appearance with sleek angle design. Delivering up to 4,700 lumens by replacing up to 250 watt metal halide luminaires, provides energy saving up to 68%. Our CWP is ideal for outdoor applications such as carports, loading areas, driveways, parking areas, and pathways. Designed for wall mounting above four feet from ground.



**Rated Life 50,000 Hours
Warranty 3 Years**


APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades

FEATURES

- IP65 Rated
- UL Listed
- Color Temp: 5000K
- Voltage: 120-277V
- Power Factor: >0.9
- Surge Protection: 2KV
- Beam Angle: Cut-off
- CRI: 70
- Operating temperature: - 4°F - 122°F
- Uniform and consistent color
- 15-30 foot height performance
- Material: Die Cast Aluminum
- Lens: Shatter-resistant glass
- Color: Bronze
- 3Year Warranty
- Optional Accessories for Purchase: Photocell Sensor, Emergency Driver

ACCESSORIES



SAMPLE NUMBER LED-FXCWP60/50K/DB

STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP	FINISH COLOR
LED LED Lighting	FX Fixture	CWP Cut-off Wall Pack	60 60 Watt	50K 5000K	DB Dark Bronze



ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Voltage	Equiv. Wattage (W)	Color	IP65 Rated
60	7099	LED-FXCWP60/50K/DB	5000K	4,700	120-277V	250	Bronze	•

ACCESSORIES (Ordered Separately)

Emergency Driver



7334 BAEM15-48BC/MV-A
(15W CEC Compliant LED Emergency Driver)


Photocell



P10036 SEN-PHO-BT-MT/MV
(Button Photocell 120-277V)


DIMENSIONS

60W
10.36-lbs

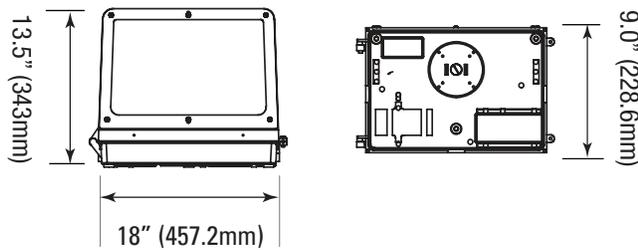

PHOTOMETRICS CHART

60 Watt



Center Beam Fc	Beam Width
17.0ft	6.47 ft 43.7 ft 43.8 ft
34.0ft	1.62 ft 87.4 ft 87.6 ft
51.0ft	0.72 ft 131.1 ft 131.4 ft
68.0ft	0.40 ft 174.8 ft 175.1 ft
85.0ft	0.26 ft 218.5 ft 218.9 ft
102.0ft	0.18 ft 262.1 ft 262.7 ft

Vert. Spread: 104.2°
Horz. Spread: 104.3°

PACKAGE

Case Qty 1 pc

