

FMC FLUSH MOUNT COMPACT (CCT3)

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® Compact Flush Mounts (FMC) are an excellent replacement solution for traditional incandescent and fluorescent ceiling and wall mounted fixtures. Our FMC series is easy to install, dimmable, and damp location rated. Available FMC with multiple color temperature which can easily select: 3000K, 4000K, or 5000K. Perfect for residential, commercial and hospitality applications. Ideal for bathrooms, closets, small rooms, storage areas, hallways and stairways.



APPLICATIONS

Bathroom, Decoration, Hallway, Bedroom, Ceiling Mount



Rated Life 50,000 Hours
Warranty 5 Years

FEATURES

- Wet Location
- ETL Listed
- Uniform light distribution and consistent color
- Selectable Color Temperature: 3000K, 4000K, 5000K
- Input line voltage: 120
- CRI: 90
- Powerfactor >0.9
- Surge Protection: 2.5KV
- Beam Angle: Flood
- Dimmable
- Operating temperature: -4°F - 113°F
- 5Year Warranty
- Finish: White

ACCESSORIES



Recessed can installation kit

SAMPLE NUMBER		LED7FMC-90L9CCT3			
STYLE	DIAMETER	SERIES	LUMEN	CRI	COLOR TEMP
LED	7	FMC	90L	9	CCT3
LED Lighting	7-inch	Flush Mount Compact	900 Lumens	CRI 90	Selectable Color Temp




FLUSH MOUNT COMPACT (CCT3)

CEILING & AREA LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Wet Location
15	9367	LED7FMC-90L9CCT3	3CCT (3/4/5K)	714 935 794	100	7"	•


ACCESSORIES (Ordered Separately)



Installation Kit
P10261 MTK-FMC-E26-SPRING
(Recessed can installation kit)


DIMENSIONS

15W (7-inch)
0.34-lbs

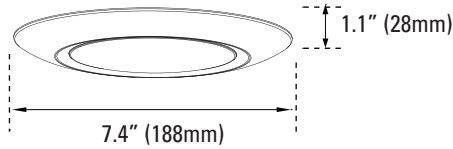

PHOTOMETRICS CHART

15W (7-inch) CCT3
Energy Star

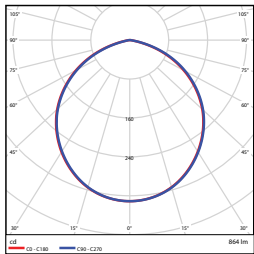

	Center Beam Fc	Beam Width	
2.5ft	53.0 fc	6.9 ft	6.9 ft
5.0ft	13.2 fc	13.8 ft	13.8 ft
7.5ft	5.89 fc	20.6 ft	20.7 ft
10.0ft	3.31 fc	27.5 ft	27.6 ft
12.5ft	2.12 fc	34.4 ft	34.5 ft
15.0ft	1.47 fc	41.3 ft	41.4 ft

Vert. Spread: 108.0°
Horiz. Spread: 108.1°

PACKAGE

Case Qty
20 pcs

